

SAS AUTOGATE

Ph. 1300 735 818
 Mob. 0411 833 448
 Fax. +61 2 9591 1815
 Int. +61 2 9591 1729




Sydney Automation Services

www.sasautogate.com
 sales@sasautogate.com

P.O. Box 191
 Enmore
 NSW 2042

Telescopic sliding gate system

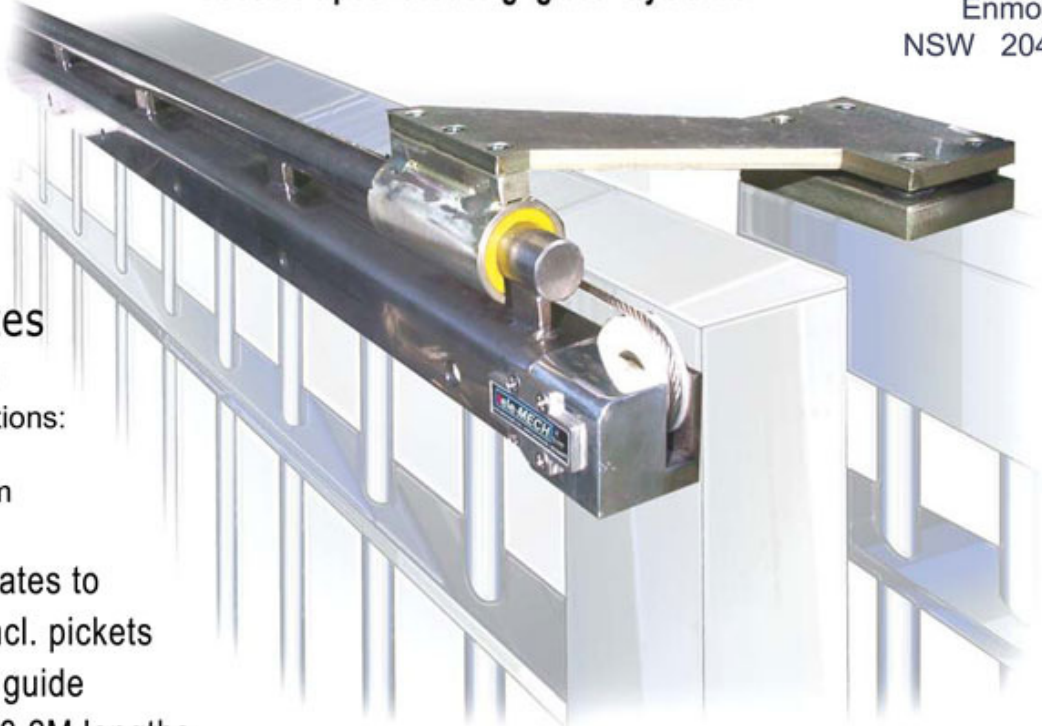

Timber Gates
 Steel Gates
 Aluminium Gates

Stand alone system

Top rail recommendations:

Steel - 75x50mm

Aluminium - 80x50mm

Timber - 66x40mm

Custom armature plates to
 suit wider profiles incl. pickets


304 Stainless Steel guide
 available in 2.4M & 3.2M lengths

Area Division Table

With 50mm gate over lap

A		A = Boundary width	
E	$E = 1/2 \text{ of } B + 50\text{mm}$	# D = 300mm	C C = F + D Required telescopic allocation
F	$F = 1/2 \text{ of } B + 50\text{mm}$		
B	$2/3 \text{ of } A - D$ or $A - C$ Maximum driveway width	D	

D # teleMech requires 250mm - most domestic sliding gate motors require 300mm

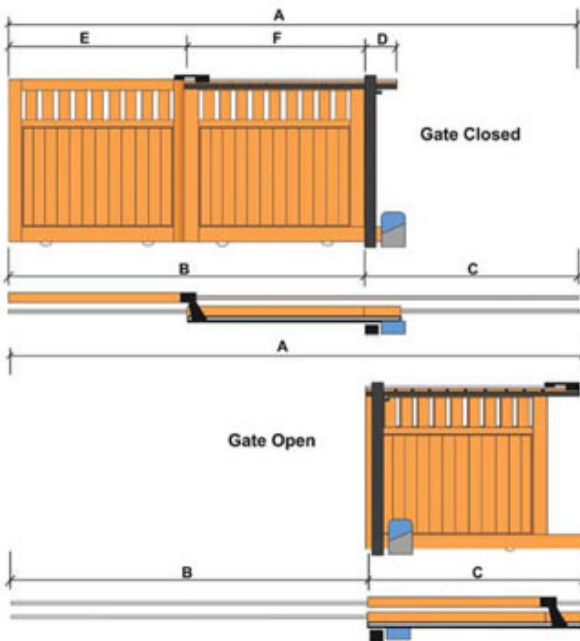

Easily assembled on site
 Left and right hand, directional armatures
 Site must be level within 10 to 20mm
 Tele-Mech guide channel sold by the Metre
 Full Kits available - incl. tele-Mech, track, motor,
 rack and remote control equipment

